





The mark of responsible forestry

Paged DryGuard

ThickPly Baltic Pine plywood, surface treated with water-based coating to provide for water repellence (EN 927-5). Thanks to the special treatment the panel helps its users to save time during construction time. Its water-repellent surface reduces water absorption and does not hamper air permeability. The surface agent applied during manufacturing post processing slows down the rate of moisture penetration and helps maintain the rigidity and dimensional stability of the panel. In addition the coating protects the panel against fungal growth (EN 927-3).

KEY BENEFITS AND APPLICATIONS

- Main application areas include: construction, housing, campervan and mobile homes production, etc.
- Water repellent
- Dimensional stability and rigidity
- Air permeability
- Easy to machine and fasten
- Environmentally friendly coating (REACH compliant)
- CE2+ certified

NOMINAL THICKNESS WITH STANDARD DEVIATION, NUMBER OF PLIES, DENSITY AS PER EN 315, EN 323 & EN 324


Nominal Thickness (mm)*	Number of plies (pcs)	Standard Deviation (mm)		Weight (kg/m²)	Density avg. (kg/m³)
9	4	-0,7	+0,5	5,3	_
12	5	-0,8	+0,6	7	
15	7	-0,8	+0,7	8,8	
18	8	-1,0	+0,7	10,5	
21	9	-1,0	+0,8	12,3	
24	10	-1,1	+0,9	14	
27	11	-1,7	+1,4	15,8	
30	12	-1,9	+1,5	17,6	

^{*}Other thicknesses available upon request

STANDARD SIZES* [mm]

2500x1250 2440x1220

*Other formats available on request

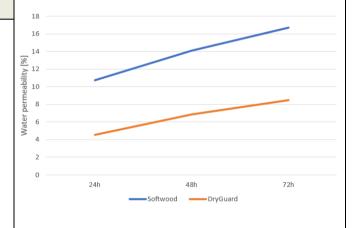

^{**}As measured at 8-12% moisture content



