


# Paged Form



<p>Paged Form is made of thick veneer softwood panel covered on both sides with special craft-based paper impregnated with resins. The specific construction of the panel reinforces its durability and resistance, while the surface and strength of the overlay allows its user to achieve a spotless surface press.</p>		<p><b>KEY BENEFITS AND APPLICATIONS</b></p> <ul style="list-style-type: none"><li>▪ Main application areas include: formwork, pre-fabricated concrete elements, paving slabs and stones</li><li>▪ Smooth board surface</li><li>▪ Rigidity and moisture resistance</li><li>▪ Made in Poland</li></ul>		<p><b>STANDARD SIZES* [mm]</b></p> <div>2500x1250</div> <div>2440x1220</div> <p><small>*Other formats available on request</small></p> <hr/> <p><b>DIMENSIONAL DEVIATION AS PER EN 315 &amp; EN 324</b></p> <table><tr><td>Length/Width</td><td>Deviation</td></tr><tr><td>&lt; 1000 mm</td><td>± 1 mm</td></tr><tr><td>1000 – 2000 mm</td><td>± 2 mm</td></tr><tr><td>&gt; 2000 mm</td><td>± 3 mm</td></tr></table> <p><b>STRAIGHTNESS AND SQUARENESS DEVIATION AS PER EN 315 &amp; EN 324</b></p> <table><tr><td></td><td>Deviation</td></tr><tr><td>Straightness</td><td>± 0,1% or ± 1mm/m</td></tr><tr><td>Squareness</td><td>± 0,1% or ± 1mm/m</td></tr></table>		Length/Width	Deviation	< 1000 mm	± 1 mm	1000 – 2000 mm	± 2 mm	> 2000 mm	± 3 mm		Deviation	Straightness	± 0,1% or ± 1mm/m	Squareness	± 0,1% or ± 1mm/m								
Length/Width	Deviation																										
< 1000 mm	± 1 mm																										
1000 – 2000 mm	± 2 mm																										
> 2000 mm	± 3 mm																										
	Deviation																										
Straightness	± 0,1% or ± 1mm/m																										
Squareness	± 0,1% or ± 1mm/m																										
<p><b>NOMINAL THICKNESS WITH STANDARD DEVIATION, NUMBER OF PLIES, DENSITY AS PER EN 315, EN 323 &amp; EN 324</b></p> <table><tr><td>Nominal Thickness (mm)*</td><td>Number of plies (pcs)</td><td colspan="2">Standard Deviation (mm)</td><td>Weight (kg/m²)</td><td>Density avg. (kg/m³)</td></tr><tr><td>15</td><td>5</td><td>-0,8</td><td>+0,7</td><td>8,8</td><td rowspan="3">585**</td></tr><tr><td>18</td><td>7</td><td>-1,0</td><td>+0,7</td><td>10,5</td></tr><tr><td>21</td><td>8</td><td>-1,0</td><td>+0,8</td><td>12,3</td></tr></table> <p><small>*Other thicknesses available upon request</small></p> <p><small>**As measured at 8-12% moisture content</small></p>						Nominal Thickness (mm)*	Number of plies (pcs)	Standard Deviation (mm)		Weight (kg/m²)	Density avg. (kg/m³)	15	5	-0,8	+0,7	8,8	585**	18	7	-1,0	+0,7	10,5	21	8	-1,0	+0,8	12,3
Nominal Thickness (mm)*	Number of plies (pcs)	Standard Deviation (mm)		Weight (kg/m²)	Density avg. (kg/m³)																						
15	5	-0,8	+0,7	8,8	585**																						
18	7	-1,0	+0,7	10,5																							
21	8	-1,0	+0,8	12,3																							
<p><b>COATING</b></p> <table><tr><td>Coating type</td><td>Kraft paper impregnated with phenolic resin</td></tr><tr><td>Thickness</td><td>367 g/m²</td></tr></table>						Coating type	Kraft paper impregnated with phenolic resin	Thickness	367 g/m²																		
Coating type	Kraft paper impregnated with phenolic resin																										
Thickness	367 g/m²																										
<p><b>RELEASE OF FORMALDEHYDE (EN 717-1)</b></p> <p>⅓ E1</p>		<p><b>BONDING QUALITY (EN 314-2)</b></p> <p>Class 3</p>		<p><b>MACHINING</b></p> <p>Edge machining, CNC machining and drilling on request</p>																							
<p><b>ADDITIONAL INFORMATION</b></p> <div><div>1.</div><div>General Terms of Sales available from <a href="http://www.sklejkapaged.pl">www.sklejkapaged.pl</a></div></div> <div><div>2.</div><div>Declaration of Performance available from <a href="http://www.sklejkapaged.pl">www.sklejkapaged.pl</a></div></div> <div><div>3.</div><div>Film-faced plywood in-house norms and standards available from <a href="http://www.sklejkapaged.pl">www.sklejkapaged.pl</a></div></div> <div><div>4.</div><div>Surface coating types: MDO/MDO, MDO/F</div></div>																											

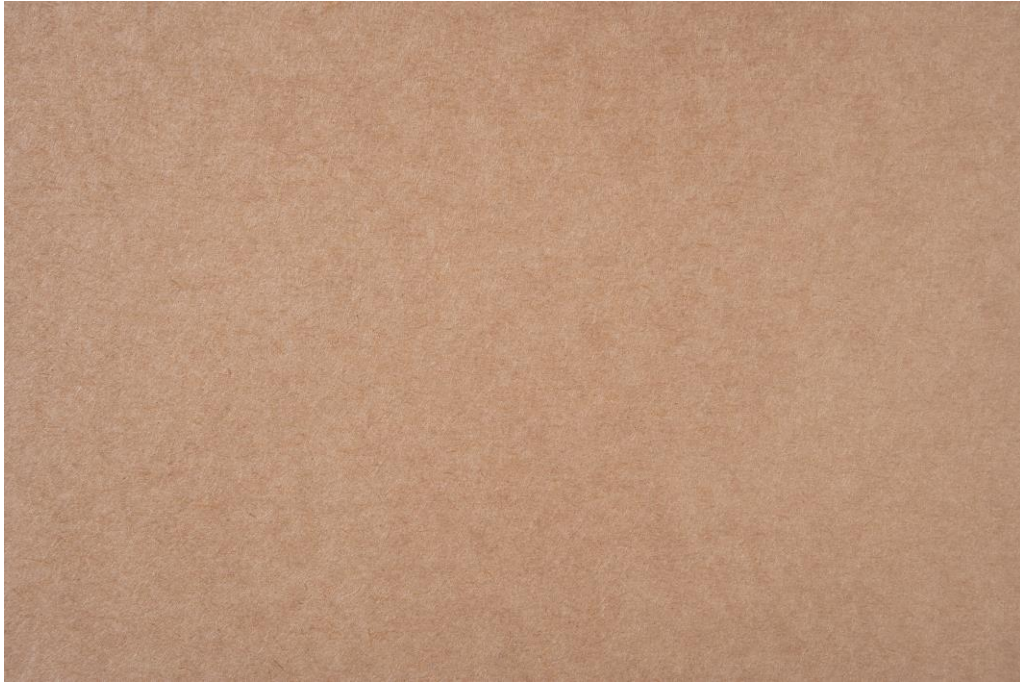

Our product is made of renewable resource. Our products are characterized by low carbon footprint and are produced from certified wood, thus respecting the natural environment and the local community. The information contained in this document is intended as a guideline only and comes without warranty. We reserve the right to amend product specification sheets without notice.